

ENROLL CZ spol. s r.o.



Tajfun



Ensuring
success
in blown
insulation
projects

Kit for moistened application

Application machine



Trolley with tank 130 l + pump



Wall Scrubber



Nozzle

Our TAJFUN application machine is the perfect choice for wet or dry blown cellulose insulation



Tajfun



CZECH
PRODUCT



Technical characteristics	
Hopper volume	310 dm ³
Max. input of both fans	2800 W
Main motor input	1100 W
Size (W x D x H)	750 x 1050 x 1250
Weight	189 kg
Outer output diameter	75 mm
Electrical supply	230 V / 50 Hz digital voltmeter
Current	16 A
Operational performance	performance depends on density of blown material
Material delivery rate	up to 750 kg/hour




The blown insulation application machine TAJFUN has been designed for optimum performance by an established manufacturer of cellulose insulation. Hose and hose connections are not included in the basic price. Optional equipment is available for damp spraying of cellulose insulation.

ENROLL CZ + TAJFUN = TRADITION AND EXPERIENCE



plus VAT

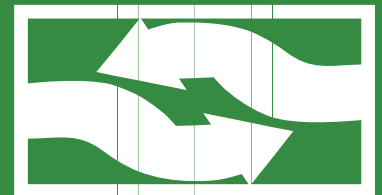

ENROLL CZ spol. s r.o.

ENROLL CZ spol. s r.o.

Nová Ves 190

463 31 Chrastava

Czech Republic

Phone: +420 482 725 344

Phone: +420 482 720 511

e-mail: info@enroll.cz

www.enroll.cz